

ABODO

Carefully Crafted Timber



About Abodo

Carefully Crafted Timber

Our Craft

Abodo crafts timbers with lasting beauty that are safe for people and the environment.

Our timbers stand the test of time, they are beautiful, durable and rapidly renewable.

Formed in 2001 by the Gudsell family, Abodo remains a New Zealand-owned, family business with a purpose.

Our Philosophy

Our design ethos has two core components:

Lifetime beauty

Abodo timbers are crafted to be enjoyed for years to come. Designed to age with grace, our timbers have exceptional weatherability and maintain their durability and beauty for a lifetime.

With tomorrow in mind

Our timbers are harvested from New Zealand's FSC® certified rapidly renewable plantation forests. They are ethically crafted with respect from beginning to end – allowing us to meet today's increasing needs without disadvantaging future generations.



Vulcan Cladding



Vulcan WB12 – 138x20 in Nero Finish

Overview

Vulcan Cladding is created from thermally modified New Zealand plantation timber and engineered with a patented vertical grain construction for superior weathering characteristics. A fine sawn face allows a depth of grain, and optimal coating performance.

The thermal modification process and vertical grain structure means Vulcan Cladding has enhanced stability, reduced resin content, is a beautiful homogeneous brown colour, and is naturally durable so does not require any chemical preservatives.

Available in a range of architectural profiles and supplied factory pre-finished in Abodo Protector – Water Borne – Abodo’s high performance plant based exterior oil.

Wood species: Thermally Modified Radiata Pine (Pinus Radiata).

Standard profiles:



WB10 145x20
(125mm cover) Vertical/Horizontal



WB10 180x20
(160mm cover) Vertical/Horizontal



WB12 138x20
(118mm cover) Vertical



WB12 180x20
(160mm cover) Vertical



WB12 90x40
(70mm cover) Vertical



WB12 90x60
(70mm cover) Vertical

All profiles with band sawn face.

Lengths: Fixed length packs – 2.4, 3.0, 3.6, 4.2, 4.8, 5.4, 6.0m (heavy 3.6 – 4.8m).
10% surcharge 5.4 to 6.0m.
Lengths are subject to availability at time of order.

Colours: Colours presented are in Protector – Water Borne and are indicative only.
Colour may change/fade as a part of the natural weathering process.




Vulcan Nero



Vulcan Walnut



Vulcan Graphite




Vulcan Teak



Vulcan Patina




Vulcan Straw



Vulcan Sioux
(Weathered 1yr)



Vulcan Charred



Vulcan Clear

Vulcan Screening



Vulcan Screening 138x25, 88x42 in Sioo:x Finish

Overview

Vulcan Screening is created from thermally modified New Zealand plantation timber and engineered with a vertical grain construction for superior weathering characteristics.

The thermal modification process combined with lamination means Vulcan Screening has enhanced stability, reduced resin content, is a beautiful homogenous brown colour, and is naturally durable so does not require any chemical preservatives.

An excellent choice for appearance grade applications such as joinery, pergola, screening, facade fins, ballustrading.

Wood species: Thermally Modified Radiata Pine (Pinus Radiata).

Lengths: Fixed length packs – 2.4, 3.0, 3.6, 4.2, 4.8, 5.4, 6.0m (heavy 3.6 – 4.8m).
10% surcharge 5.4 to 6.0m.
Lengths are subject to availability at time of order.

Sizes:	Finished dimensions					
	42 x 18	65 x 25	32 x 32	42 x 42	88 x 65	138 x 88
65 x 18	88 x 25	42 x 32	65 x 42	138 x 65	180 x 88	180 x 138
88 x 18	138 x 25	65 x 32	88 x 42	180 x 65		
138 x 18	180 x 25	88 x 32	138 x 42	238 x 65		
180 x 18		138 x 32	180 x 42	290 x 65		
		180 x 32	238 x 42			
		290 x 32	290 x 42			

Supplied as standard with fine band sawn finish four sides.
Other sizes are subject to minimum order volumes and lead time.

Colours: Colours presented are in Protector – Water Borne and are indicative only.
Colour may change/fade as a part of the natural weathering process.



Vulcan Nero



Vulcan Walnut



Vulcan Graphite



Vulcan Teak



Vulcan Patina



Vulcan Straw



Vulcan Sioo:x
(Weathered 1yr)



Vulcan Clear

Vulcan Panelling



Vulcan Panelling TG9 – 140x10 Clear Coating

Overview

Vulcan Panelling is created from thermally modified New Zealand plantation timber and engineered with a patented vertical grain construction for superior weathering characteristics.

The thermal modification process and vertical grain structure means Vulcan Panelling has enhanced stability, reduced resin content, is a beautiful homogeneous brown colour, and is naturally durable so does not require any chemical preservatives.

Wood species: Thermally Modified Radiata Pine (Pinus Radiata).

Standard profiles:



TG9 – 140x10 (135mm cover)



TG9 – 180x10 (175mm cover)

Profiles with smooth faces.
Sanding required prior to coating.
Please contact Abodo for recommended coating options.
Other custom profiles are available but may be subject to minimum order quantities.

Lengths: Fixed length packs – 2.4, 3.0, 3.6, 4.2, 4.8, 5.4, 6.0m (heavy 3.6 – 4.8m).
10% surcharge 5.4 to 6.0m.
Lengths are subject to availability at time of order.

Applications: Interior ceilings, interior walls, exterior soffits, exterior protected applications (e.g. walls not fully exposed to the weather).

Cladding

Indicative Quantities Chart

Profile	Width	Depth	Orientation	Cover (mm)	Cavity batten Centres (mm)	Fixings (Pieces/ lm)	Fixings (Pieces/ m2)	Lineal metres/ m2	Protector – Water Borne Second Coat Litres/lm*	Protector – Water Borne Second Coat Litres/m2 *
Vulcan Cladding – Band Sawn Face – Select Grade – Stain Finish										
Vulcan WB10	145 x 20		Horizontal	125	600	1.67	13.33	8	0.0125	0.1
Vulcan WB10	180 x 20		Horizontal	160	600	1.67	10.42	6.25	0.016	0.1
Vulcan WB10	145 x 20		Vertical	125	480	2.08	16.67	8	0.0125	0.1
Vulcan WB10	180 x 20		Vertical	160	480	2.08	13.02	6.25	0.016	0.1
Vulcan WB12	138 x 20		Vertical	118	480	2.08	17.66	8.47	0.0118	0.1
Vulcan WB12	180 x 20		Vertical	160	480	2.08	13.02	6.25	0.016	0.1
Vulcan WB12	90 x 40		Vertical	70	480	2.08	29.76	14.29	0.007	0.1
Vulcan WB12	90 x 60		Vertical	70	480	2.08	29.76	14.29	0.007	0.1

Clarifications:

- Quantities given do not allow for wastage or additional fasteners needed for detailing/mouldings.
- Final order quantities are the buyer's responsibility and should be checked and verified prior to order placement.
- Abodo will not accept liability for over or under-ordered items.


* Coating quantities are approximate only and may vary depending on application method and rate.

For more information on product handling and information go to www.abodo.com.au/resources



Cladding Mouldings


Standard exterior mouldings:

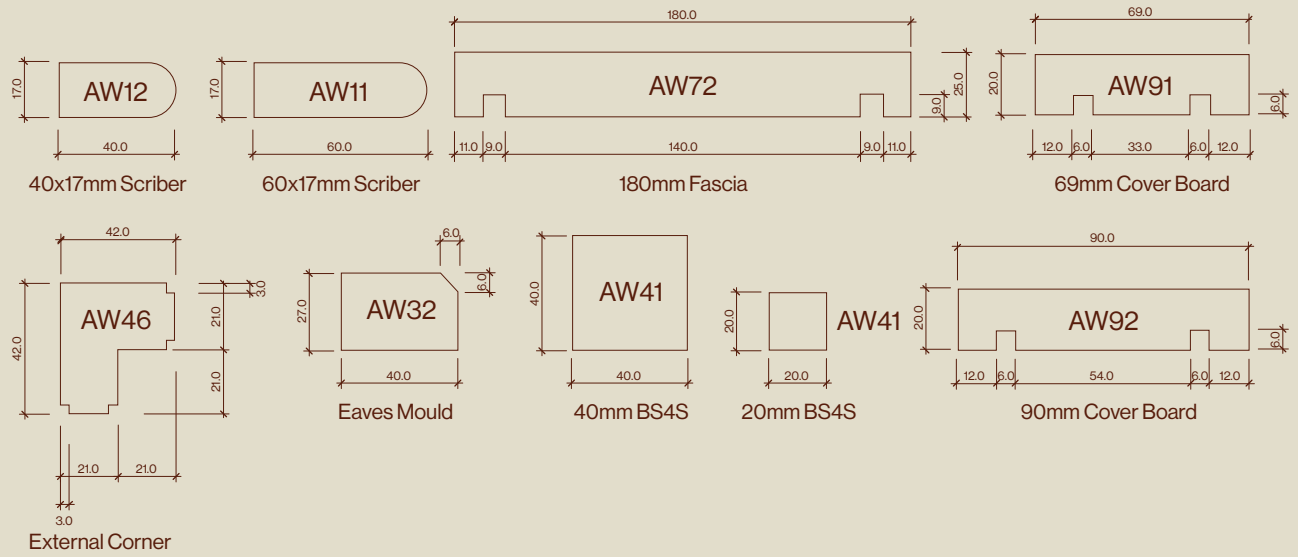


Note: Stain finish mouldings with bandsawn faces.

Mouldings generally supplied in 4.2m lengths unless advised otherwise.


Coatings




Protector – Water Borne
500ml, 4L, 10L




Protector – End Seal
1L bottle, 18kg bulk flagon
(clear only)




Char Oil
4L, 10L and
250ml sample bottles



Sioo:x
5L



Sioo:x Maintenance Wash
5L



Sioo:x End Grain Sealer
1L



W brittontimbers.com.au

Contact Abodo's distribution partner,
Britton Timbers:

Britton Timbers NSW

P (02) 8783 9900
116-118 Jedda Road
Prestons, NSW 2170
sales.nsw@brittontimbers.com.au

Britton Timbers QLD, NT

P (07) 3888 3351
100 Potassium Street
Narangba, QLD 4504
sales.qld@brittontimbers.com.au

Britton Timbers VIC, SA, TAS

P (03) 8769 7111
25 Gaine Road
Dandenong, VIC
sales.vic@brittontimbers.com.au

