

# TASMANIAN MYRTLE FLOORING

## *Nothofagus Cunninghamii*

*Few timbers can match the striking beauty of Tasmanian Myrtle. Easily worked and hard-wearing, its rich red hues are instantly recognisable.*

*The fiddle-back grain stands-out under high quality finishing giving the timber a sought-after individuality.*



*Britton's Tasmanian Myrtle Flooring displays a warmth and vibrancy that adds interest to domestic and commercial applications.*

*Tasmanian Myrtle is harvested from the temperate forests of north-west Tasmania and is processed at Britton's nearby state-of-the-art mill where it is machined and dried to ensure the highest standards of stability and durability.*

*Britton Timbers carries stocks of sustainably harvested Tasmanian Myrtle and distributes nationally. Britton Timbers International handles shipping to overseas destinations.*

**Covers:** 12mm Overlay - 65x12, 85x12, 108x12, 133x12

**Secret Nailing, End-Matched:** 65x19, 85x19, 108x19, 133x19, 160x19

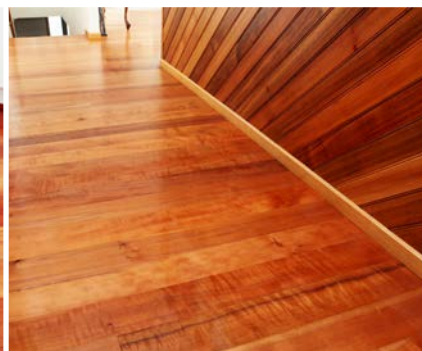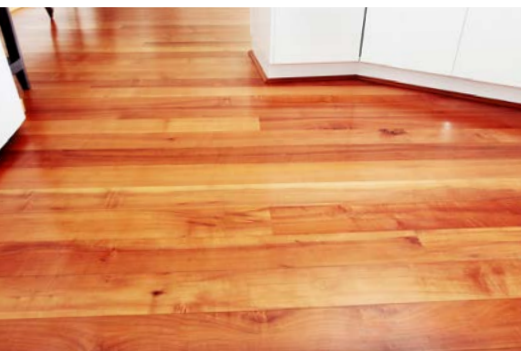

## TECHNICAL INFORMATION

Density (kg/m <sup>3</sup> dry)	700	Tangential Shrinkage %	4.5	Machining	Good
Specific Gravity	0.72	Hardness (Janka) (kN)	6	Resistance to Split in Nailing	Good
Modulus of Rupture (MPa dry)	108	Finish	Good	Resistance to Split in Screwing	Good
Modulus of Elasticity (GPa dry)	14	Stability	Good	Gluing	Good
Radial Shrinkage %	2.5	Sapwood Lyctid Susceptible	Yes	Growing Region	TAS
				Availability	Limited