


AUSTRALIAN CHESTNUT

Eucalyptus Obliqua, Eucalyptus Sieberi, Eucalyptus Fastigata



www.brittontimbers.com.au

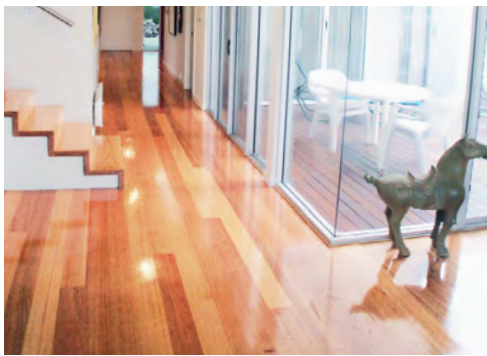

Description

Flooring is characterised by subtle colour variations from mellow straw brown to light chocolates.

Durable eucalypts are blended to provide a sophisticated, natural beauty to any interior.

Also known as Southern Blackbutt, Chestnut.

Suitability

- ✗ Boating
- ✓ Cabinet Door
- ✗ Decking & Cladding
- ✓ Flooring & Staircase
- ✓ Furniture
- ✓ Joinery

TECHNICAL INFORMATION

Density (kg/m ³ dry)	800	Hardness (Janka) (kN)	8	Resistance to Split in Nailing	Good
Specific Gravity	0.8	Finish	Good	Resistance to Split in Screwing	Good
Modulus of Rupture (MPa dry)	118	Stability	Good	Gluing	Good
Modulus of Elasticity (GPa dry)	15	Durable	Yes	Growing Region	VIC
Radial Shrinkage %	3.5	Sapwood Lyctid Susceptible	No	Availability	Widely
Tangential Shrinkage %	6	Machining	Good		

New South Wales

116-118 Jemma Rd
Prestons NSW 2170

☎ 02 8783 9900

Victoria

25 Gaine Rd
Dandenong VIC 3175

☎ 03 8769 7111

Queensland

29 Sodium St
Narangba QLD 4504

☎ 07 3888 3351

Tasmania

3 Brittons Rd
Smithton TAS 7330

☎ 03 6452 2522



PEFC™
PEFC/21-31-233