

AUSTRALIAN CHESTNUT FLOORING

Eucalyptus Obliqua, E.Sieberi and E.Fastigata

A blend of Australia's most durable and attractive eucalyptus species, the subtle colours and tonal variations of Australian Chestnut Flooring belie its durability and strength.


Tough and hard with a distinctive colour palette, the natural beauty of Australian Chestnut Flooring is proving popular with architects and builders.

Australian Chestnut requires very little maintenance beyond the initial coating and will stand the test of time in a variety of situations.

Britton Timbers carries stocks of Australian Chestnut Flooring at our Melbourne, Sydney and Brisbane outlets; and can arrange prompt supply to overseas destinations through Britton Timbers International.

Sizes: 19 x 85 Tongue and Grooved Secret Nailed End Matched
 19 x 130 Tongue and Grooved End Matched
 14 x 85 Tongue and Grooved Overlay
 14 x 130 Tongue and Grooved Overlay

Britton Timbers can supply matching stair componentry and stair treads.

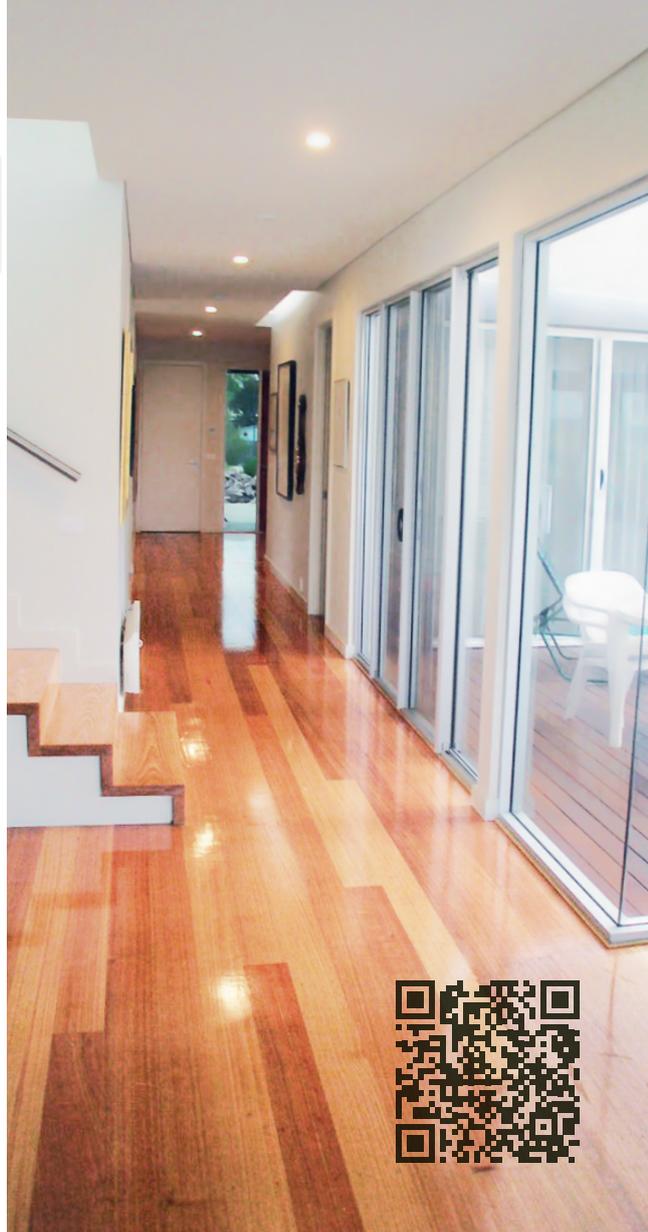

TECHNICAL INFORMATION

| | | | | | |
|---------------------------------|-----|----------------------------|------|---------------------------------|--------|
| Density (kg/m3 dry) | 800 | Tangential Shrinkage % | 6 | Machining | Good |
| Specific Gravity | 0.8 | Hardness (Janka) (kN) | 8 | Resistance to Split in Nailing | Good |
| Modulus of Rupture (MPa dry) | 118 | Finish | Good | Resistance to Split in Screwing | Good |
| Modulus of Elasticity (GPa dry) | 15 | Stability | Good | Gluing | Good |
| Radial Shrinkage % | 3.5 | Sapwood Lyctid Susceptible | No | Growing Region | VIC |
| | | | | Availability | Widely |